DOOR AND FRAME SCHEDULE

DETAIL REFERENCES ARE TO SHEET A7 UNO

MARK	ROOM NAME	DOOR NEW/ ETR	DOOR TYPE	DOOR MATERIAL	QTY	NOMINAL SIZE W	NOMINAL SIZE H	GLASS	FRAME NEW/ ETR	FRAME TYPE	FRAME MATERIAL	DETAIL HEAD	DETAIL JAMB	DETAIL THRESHOLD	FIRE RATING (MIN)	NOTES
104A	CART STORAGE	ETR	---	---	---	5'-4"	4'-8"	---	ETR	---	---	3	---	---	---	16
118A	CART STORAGE-GR	ETR	---	---	---	12'-0"	4'-8"	---	ETR	---	---	3	---	---	---	16
128A	ALCOVE	NEW	E	PLASTIC	PR	3'-0"	9'-0"	ACRYL	ETR	---	STL-BP	---	---	---	---	20,27
165A	MEN	NEW	F	HM-STL	1	3'-0"	7'-0"	---	ETR	---	HM-STL	---	---	---	---	---
166A	WOMEN	NEW	F	HM-STL	1	3'-0"	7'-0"	---	ETR	---	HM-STL	---	---	---	---	---
167A	FAMILY TOILET	NEW	F	HM-STL	1	3'-0"	7'-0"	---	ETR	---	HM-STL	---	---	---	---	---
169A	SITE TO STORE	NEW	F	HM-STL	1	3'-0"	7'-0"	---	ETR	---	HM-STL	---	---	---	---	---
170A	HALLWAY	NEW	E	PLASTIC	PR	3'-0"	7'-0"	ACRYL	ETR	---	STL-BP	---	---	---	---	20,27
178A	RECEIVING	ETR	---	---	---	6'-0"	8'-8"	---	ETR	---	---	3	---	---	---	16
PHARMACY																
300A	PHARMACY	NEW	G1	HM-STL	1	3'-0"	7'-0"	TEMP	NEW	1	HM-STL	5	4	---	---	35,37
300B	PHARMACY	NEW	U	AL	4	4'-8"	4'-2"	---	NEW	---	AL	---	---	---	---	36
303A	HEALTH SERVICE	NEW	G1	HM-STL	1	3'-0"	7'-0"	TEMP	NEW	1	HM-STL	5	4	---	---	33,35
303B	HEALTH SERVICE	NEW	G1	HM-STL	1	3'-0"	7'-0"	TEMP	NEW	1	HM-STL	5	4	---	---	34,35

2

GENERAL DOOR NOTES

1. INSTALL/REPLACE ALL WEATHER STRIPPING AND GASKETS AT ALL EXTERIOR HOLLOW METAL DOORS. REF SPEC
2. ALL DOORS SCHEDULED AS NEW ARE TO RECEIVE COMPLETE NEW HARDWARE SETS AS LISTED IN SPECIFICATIONS.
3. AT INTERIOR HOLLOW METAL DOORS TO REMAIN, WHERE HUNG ON BUTT HINGES, INSTALL REINFORCING PIVOT(S) (H-15, REF SPEC 08710) IF NOT ALREADY PRESENT. COORDINATE NUMBER OF REINFORCING PIVOTS REQUIRED WTH DOOR HARDWARE SUPPLIER SPECIFIED IN SECTION 08710.
4. ALL UL RATED DOORS TO RECEIVE PAINT MUST HAVE UL LABELS IN PLAIN SIGHT AND BE LEGIBLE. IF EXISTING LABELS HAVE BEEN PAINTED OVER, TEST PAINT REMOVAL IN ONE LOCATION. IF PAINT REMOVAL DAMAGES UL LABEL, CONTACT CM FOR FURTHER DIRECTION. IF TEST UL LABEL IS NOT DAMAGED FROM PAINT REMOVAL, REMOVE PAINT FROM ALL UL LABELS.
5. REFERENCE ELEVATIONS ON A2 FOR EXTERIOR DOOR COLORS
6. SCHEDULED WIDTH AND HEIGHT INDICATE FINISHED OPENING SIZE AT ALL OVERHEAD AND COILING DOOR LOCATIONS
7. NOT USED
8. INSTALL/REPLACE DRIP CAP AT ALL NEW EXTERIOR DOORS AND EXTERIOR DOORS TO BE REPLACED.
9. INSTALL/REPLACE ALL MISSING OR DAMAGED DOOR SILENCERS.
10. AT ALL DOORS IMMEDIATELY ADJACENT TO CUSTOMER AREAS, ADJUST EXISTING DOOR HARDWARE TO PROPER WORKING CONDITION.
11. UNLESS NOTED OTHERWISE, GENERAL NOTES APPLY TO ALL DOORS IN THE STORE, NOT ONLY THOSE IN THE DOOR SCHEDULE.

DOOR SCHEDULE NOTES

1. REPLACE BUTTS OR HINGES. REF SPEC.
2. REPLACE ALARM OR EXIT DEVICE. REF SPEC.
3. REPLACE LATCH OR LOCK SET, REF SPEC.
4. REPLACE PUSH AND/OR PULL, REF SPEC.
5. INSTALL/REPLACE AUTOMATIC CLOSER, REF SPEC.
6. REMOVE DOOR CLOSER. PATCH AS NEEDED.
7. REPLACE ARMOR PLATE AND/OR KICKPLATE.
8. REPLACE STOP, HOLDER OR ELECTROMAGNETIC DOOR HOLDER, REF SPEC.
9. REPLACE THRESHOLD, REF SPEC.
10. INSTALL/REPLACE CONTINUOUS GEARED HINGE, REF SPEC.
11. REPLACE DOOR COORDINATOR, REF SPEC.
12. REPLACE ELECTROMAGNETIC LOCK, REF SPEC.
13. REPLACE LOCK GUARD, REF SPEC.
14. REPLACE ONE-WAY VIEWER, REF SPEC.
15. INSTALL 5"X20" WINDOW IN DOOR.
16. INSTALL/REPLACE FLEXIBLE STRIP DOOR
17. INSTALL SECTIONAL DOOR TRACK RETURN AT MAXIMUM HEIGHT AND AND AS CLOSE TO ROOF STRUCTURE AS ALLOWABLE BY MANUFACTURER.
18. REPLACE DAMAGED SECTIONAL DOOR PANELS.
19. REPAIR DAMAGED EXTERIOR WALL CORNERS AT ROLL DOOR OPENINGS.
20. FULLY GASKETED FOR NEUTRALIZATION.
21. NOT USED
22. PROVIDE 1" CLEARANCE BETWEEN EDGE OF STRIKE SIDE OF DOOR AND ADJACENT CASEWORK.
23. NOT USED
24. ENSURE GATE IS OPERATIONAL AND LATCHES. REPAIR GATE TO PROPER WORKING CONDITION IF NEEDED.
25. COORDINATE INSTALLATION OF SIGNAGE WITH DOOR MANUFACTURER: 1" HIGH LETTERS IN CONTRASTING COLORS TO BACKGROUND, TEXT TO READ "THIS DOOR TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED"
26. REMOVE EXISTING DOOR AND HARDWARE. EXISTING FRAME TO REMAIN. INSTALL HINGE FILLER PLATE AND STRIKE FILLER PLATE IN HOLLOW METAL FRAME.
27. FLEXIBLE TRAFFIC DOOR COLOR TO BE BLACK. PAINT DOOR FRAME P36. DO NOT PAINT STAINLESS STEEL FRAMES.
28. FLEXIBLE TRAFFIC DOOR TO BE KHAKI. PAINT DOOR FRAME P102.
29. INSTALL HINGE FILLER PLATE PRIOR TO INSTALLATION OF CONTINUOUS HINGE.
30. PROVIDE VENDOR WITH FIELD VERIFIED DIMENSION OF CLEAR WIDTH AFTER REFRIGERATED CASES HAVE BEEN INSTALLED. DOOR COLOR TO BE BLACK.
31. SHUTTER TO RECEIVE CLEAR POLYCARBONATE SLATS, REF SPECS.
32. INSTALL STAND ALONE CARD READER, REF ELECTRICAL, REF 11-A7
33. 3M CRYSTAL GLASS FINISH 7725SE-314 DUSTED CRYSTAL FROSTED FILM AT 55% OPACITY PRE-INSTALLED BY MODULAR PANEL MANUFACTURER.
34. 3M CRYSTAL GLASS FINISH 7725SE-314 DUSTED CRYSTAL FROSTED FILM AT 55% OPACITY UP TO 4'-0"AFPRE-INSTALLED BY MODULAR PANEL MANUFACTURER.
35. DOOR FRAMES AND DOORS ARE PRE-FINISHED BY MODULAR PANEL MANUFACTURER, FRAMES ARE PRE-INSTALLED IN PRE-MANUFACTURED WALL. GC TO INSTALL OWNER FURNISHED DOOR SLABS.
36. COILING SHUTTER FURNISHED BY MODULAR PANEL MANUFACTURER, GC INSTALLED ON MODULAR WALLS.
37. 3M CRYSTAL GLASS FINISH 7725SE-314 DUSTED CRYSTAL FROSTED FILM AT 55% OPACITY WITH DIE CUT LOGO PRE-INSTALLED BY MODULAR PANEL MANUFACTURER.

2

FINISH KEY

REF SPECIFICATIONS FOR EXACT COLORS REQUIRED

MARK	FINISH	COLOR	DESCRIPTION
ACT1	ACOUSTICAL CEILING TILE	WHITE	24"x48"
ACT2	ACOUSTICAL CEILING TILE	WHITE	24"x48" VINYL FACED NON-PERFORATED
ACT3	ACOUSTICAL CEILING TILE	WHITE	24"x48"
ACT4	ACOUSTICAL CEILING TILE	WHITE	24"x48"
ACTG	ACOUSTICAL CEILING GRID	WHITE	
B4	RESILIENT BASE	BLACK	4"
B6	PLASTIC BASE	BLACK	6"x 1/4"
B9	PLASTIC BASE	BLACK	4"x 1/4"
B10	PLASTIC BASE OUTSIDE CORNER	BLACK	
C1	CUSHION BACK TILE CARPET		
CC	CONCRETE CURB		
CT2	ENTRY TILE	RED	6"x6x3/8"
CT9	ACCENT TILE	ADOBE SUNSET	
CT13	PORCELAIN FLOOR TILE	BROWN	
CT18	SANITARY FLOOR MOLDING	SUNSET	
CT19	GLAZED WALL TILE	IVORY	5"
CT45	PORCELAIN WALL TILE	WHITE	4"x8"x3/8"
DB5	DURA-TUFF BASE	BLACK	10"
DB10	DURA-TUFF BASE	BLACK	
EC	EXPOSED CONCRETE	CLEAR SEALER	
ETR	EXISTING TO REMAIN		FRP WALL PANEL
FRP1	FIBERGLASS REINFORCED PLASTIC	WHITE	FRP WALL PANEL
FRP2	FIBERGLASS REINFORCED PLASTIC	BEIGE	
G1	GROUT	DARK GRAY	
G2	GROUT	DARK GRAY	
G3	GROUT	LT TAN	
G4	GROUT	DARK GRAY	
G7	GROUT	BROWN	
G9	GROUT	LT GRAY	
G13	GROUT	BEIGE	
ICC	INTEGRAL COLORED CONCRETE	BROWN	
P5	PAINT	SAFETY YELLOW	"SAFETY YELLOW" OSHA STANDARD
P10	PAINT	DARK BROWN	"TAN BARK" SW #6061
P11	PAINT	CARAMEL	
P12	PAINT	BEIGE	"BISCUIT" SW #6112
P13	PAINT	GREEN	"SHAMROCK" SW #6454
P15	PAINT	GRAY	"SUMMIT GRAY" SW #7669
P16	PAINT	DARK GRAY	"SOFTWARE" #7074
P21	PAINT	RED	"SAFETY RED" SW #4081
P33	PAINT	WHITE	"DOVER WHITE" SW #6385
P36	PAINT	BLACK	"DOMINO" SW #6989
P49	PAINT	GAUNTLET GRAY	"GAUNTLET GRAY" SW #7019
P57	PAINT	ROYCROFT PEWTER	"ROYCROFT PEWTER" SW #2848
P59	PAINT	GRAY	"CLASSIC FRENCH GRAY" SW #0077
P68	PAINT	LIGHT TAN	"INTERACTIVE CREAM" SW #6113
P81	PAINT	BLACK	"TRICORN BLACK" SW #6258
P100	PAINT	LIGHT BLUE	"NOTABLE HUE" SW #6521
P102	PAINT	TAN	"BEACH HOUSE" SW #7518
P114	PAINT	MEDIUM TAN	"DEER VALLEY" SW #7720
P115	PAINT	DARK BROWN	"TURKISH COFFEE" SW #6076
P126	PAINT	ORANGE	"KNOCKOUT ORANGE" SW #6885
P126U	PAINT	ORANGE	"KNOCKOUT ORANGE" SW #6885 (URETHANE)
P130	PAINT	GREEN	"OUTRAGEOUS GREEN" SW #6922
P130U	PAINT	GREEN	"OUTRAGEOUS GREEN" SW #6922 (URETHANE)
P131	PAINT	WHITE	"WHITE FLOUR" SW #7102
P134	PAINT	REPOSE GRAY	"REPOSE GRAY" SW #7015
P135	PAINT	DORIAN GRAY	"DORIAN GRAY" SW #7017
P139	PAINT	GREEN	"MELANGE GREEN" SW #6710
P152	PAINT	NM BRAND GREEN	PANTONE 368C
P162	PAINT	MEDIUM GRAY	"PEPPERCORN" SW #7674
P163	PAINT	BLUE	"TURQUISH" SW #6939
P164	PAINT	GRAY	"ESSENTIAL GRAY" SW #6002
P166	PAINT	BLUE-GREEN	"MARINER" SW #6766
PF4	PREFINISHED METAL	DARK ZINC	
PL4	PLASTIC LAMINATE	MAPLE	
PL6	PLASTIC LAMINATE	LIGHT TAN	
PL11	PLASTIC LAMINATE	NORTH SEA GRAY	
PL12	PLASTIC LAMINATE	MYSTED ZEPHYR	
PL20	PLASTIC LAMINATE	TAN	
PL22	PLASTIC LAMINATE	DEEPSTAR AGATE	
PL23	PLASTIC LAMINATE	STAINLESS	
PL27	PLASTIC LAMINATE	GREEN	
PL29	PLASTIC LAMINATE	WHITE	
PL30	PLASTIC LAMINATE	STEEL MESH	
PL31	PLASTIC LAMINATE	GREY	
PL32	PLASTIC LAMINATE	VISION VAVA	
PS3	PROTECTIVE SURFACING	BRUSHED SURFACING	
PS7	PROTECTIVE SURFACING	"GRAY PATTERN"	
PVC1	PVC PLANK FLOORING	WOODGRAIN	
QT3	QUARRY TILE	GRAY	6"X6" ABRASIVE
QT31	QUARRY TILE	RED	6"X6" ABRASIVE
RCS1	RECYCLED CERAMIC SOLID SURFACE	GRENITE "BIRCH PRADA"	
RF1	RESINOUS FLOOR	GRAY	
RF2	RESINOUS FLOOR	RED	
SS	STAINLESS STEEL		18 GA. GRADE 304 W/ NO. 3 FINISH
SCB6	SANITARY COVED BASE	TAN	REF 10-A3
TC	TEXTURED CONCRETE		
VCT9	VINYL COMPOSITION TILE	WHITE	
VCT11	VINYL COMPOSITION TILE	BEIGE	
WB	2x8 WOOD BASE		
WG	BLACK PLASTIC WALL GUARD	BLACK	
WB10	2x10 WOOD BASE		

GENERAL FINISH NOTES

C/A070-GN

1. PAINT ALL METAL DOOR FRAMES VISIBLE TO CUSTOMER (EXCEPT DOORS IN CMU WALLS) WITH EPOXY PAINT.
2. PAINT ALL HM DOORS AND FRAMES LOCATED IN NEWLY PAINTED WALLS AS INDICATED: -DOORS AND FRAMES SHALL BE PAINTED P162 UNO.
3. AT ROOMS SCHEDULED TO RECEIVE NEW PAINT: OMIT PAINT AT WALLS CONCEALED BY HALF-GONDOLAS, WALL STANDARDS OR WAREHOUSE RACKING WTH PEG-BOARD BACKING. AT WALL STANDARDS, GONDOLAS AND WAREHOUSE RACKING WITHOUT PEG-BOARD BACKING, PAINT WALL TO BASE. REF 4-A1.1.
4. INSTALL MISSING CEILING TILES TO MATCH ADJACENT TILES IN ALL ROOMS WHERE LAY-IN CEILING TILE IS ETR.
5. AT EXPOSED PAINTED STRUCTURE OR DECK, PAINT NEW CONDUIT, DUCTWORK AND FIRE SPRINKLER PIPING (FIRE SPRINKLER HEADS TO REMAIN UNPAINTED) TO MATCH ADJACENT STRUCTURE OR DECK
6. FOR PLASTIC LAMINATE WAINSCOT, INSTALL INSIDE AND OUTSIDE EDGE TRIM AT ALL EXPOSED EDGES, DO NOT INSTALL ON BLOCK WALLS, REFERENCE SPECIFICATIONS
7. FOR PROTECTIVE WALL SURFACING WAINSCOT, INSTALL INSIDE AND OUTSIDE CORNER TRIM AND TOP CAP, DO NOT INSTALL ON BLOCK WALLS, REFERENCE SPECIFICATIONS
8. WHEN PIECE REPLACING CEILING TILE GC TO MATCH NEW TILE TO ADJACENT SURROUNDING CEILING TILE.
9. WHERE NEW PLASTIC LAMINATE OR PROTECTIVE SURFACING WAINSCOT IS TO BE INSTALLED, REMOVE EXISTING LAMINATE AND/OR FINISHES TO BASE SUBSTRATE PRIOR TO INSTALLATION OF NEW. INSTALLATION OF NEW LAMINATE OVER EXISTING IS NOT ACCEPTABLE. NO EXCEPTIONS.
10. NOT USED.
11. WHEN INSTALLING NEW OR REPLACING FRP, INSTALL NEW WALL BASE FULL WIDTH OF PANEL(S) TO MATCH EXISTING.
12. PATCH AND REPAIR ALL GYPSUM BOARD WALLS AND CEILINGS PRIOR TO PAINTING.



5 HEAD
1 1/2" = 1'-0"



4 JAMB
1 1/2" = 1'-0"

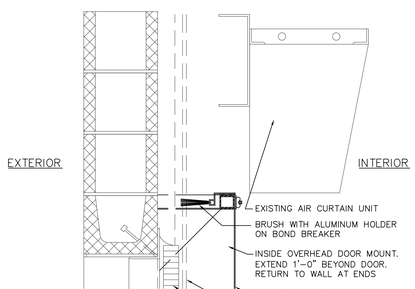

3 HEAD
1 1/2" = 1'-0"

2 DOOR FRAME
3/16" = 1'-0"

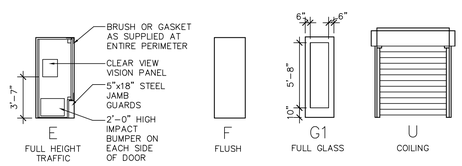

1 DOOR TYPES
3/16" = 1'-0"

NOTE: ALL HOLLOW METAL DOORS ARE 1-3/4" THICK

CYNTERGY
CYNTERGY ARCHITECTURE, PLLC
810 S CINCINNATI
SECOND FLOOR
TULSA, OK 74119
918.877.6000
www.cyntergy.com

STIPULATION FOR REUSE

THIS DRAWING WAS PREPARED FOR USE ON A SPECIFIC SITE AT FORT WORTH, TX CONTEMPORANEOUSLY WITH ITS ISSUE DATE ON 02/12/18, AND IT IS NOT SUITABLE FOR USE ON A DIFFERENT PROJECT SITE OR AT A LATER TIME. USE OF THIS DRAWING FOR REFERENCE OR EXAMPLE ON ANOTHER PROJECT REQUIRES THE SERVICES OF PROPERLY LICENSED ARCHITECTS AND ENGINEERS. REPRODUCTION OF THIS DRAWING FOR REUSE ON ANOTHER PROJECT IS NOT AUTHORIZED AND MAY BE CONTRARY TO THE LAW.

Walmart Neighborhood Market
FORT WORTH, TX
STORE NO.2979-211
GENERAL REMODEL
JOB NUMBER: USMR-006304

ISSUE BLOCK

	02/12/18	PERMIT
2	03/02/18	ADD #1
	30 X 42	SHEET SET

CHECKED BY:	JO
DRAWN BY:	TB
PROTO:	52
PROTO CYCLE:	12/29/17
DOCUMENT DATE:	02/12/18

DOCUMENTS WITHOUT SIGNATURE AND REQUIRED SEAL OF AOR/EOR ARE NOT FOR CONSTRUCTION

JAMES EDWARD TURNER
ARCHITECT OF RECORD

DOOR SCHEDULE, FINISH KEY AND DETAILS

SHEET:
A7

Mar 02, 2018 - 8:36am - USER tbillie
W:\Suprctrs\2018 Remodels\2979-211 Fort Worth TX\Drawings\0190 - A7 DOOR SCHEDULE, FINISH KEY AND DETAILS - 2979.dwg