


- GENERAL NOTES**
- IN ALL AREAS TO BE REFINISHED BY GENERAL CONTRACTOR: REMOVE ALL ELECTRICAL ITEMS FROM WALLS AND CEILING, INCLUDING BUT NOT LIMITED TO: HAND DRIVERS, ELECTRIC WATER COOLERS, RECEPTACLE COVERS, SWITCH COVERS, DISCONNECT SWITCHES AND LIGHTING FIXTURES AS REQUIRED. INSTALL AND RECONNECT AFTER NEW FINISHES ARE IN PLACE. COORDINATE EXTENT OF WORK WITH GENERAL CONTRACTOR.
- GENERAL LIGHTING NOTES** EN13
- EXIT SIGN MOUNTING
 - WALL FIXTURE: CENTER 12" ABOVE DOOR OPENING.
 - CEILING FIXTURE: ON CEILING OR AT HEIGHT SPECIFIED ON DRAWINGS.
 - PENDANT FIXTURE: MATCH HEIGHT OF EXISTING JOIST OR AT HEIGHT SPECIFIED ON DRAWINGS. IF STORE DOES NOT HAVE PENDANT MOUNTED EXIT SIGNS, THEN PENDANT MOUNT SIGN 24" BELOW BOTTOM OF BAR JOIST.
 - COORDINATE LOCATIONS OF EXIT SIGNS TO ENSURE STORE SIGNAGE DOES NOT OBSTRUCT THEIR VIEW.
 - THE USE OF TRITIUM BASED RADIOACTIVE EXIT SIGNAGE IS PROHIBITED.
 - EMERGENCY LIGHT INSTALLATION FIXTURE MOUNTING
 - WALL FIXTURE: 12" BELOW FINISHED CEILING OR +10'-0" IN AREAS OF EXPOSED STRUCTURE, UNLESS NOTED OTHERWISE.
 - PENDANT FIXTURE: BOTTOM CHORD OF BAR JOIST OR AT HEIGHT SPECIFIED ON DRAWINGS.
 - REMOTE HEAD FIXTURE: HEADS CENTERED ABOVE DOOR OPENING +9'-0", UNLESS NOTED OTHERWISE AND BATTERY PACK MOUNTED ON INTERIOR SIDE OF WALL 12" BELOW FINISHED CEILING OR AT BAR JOIST IN AREAS OF EXPOSED STRUCTURE.
 - REFER TO MANUFACTURER'S WRITTEN INSTRUCTIONS, ALLOW BATTERY TO CHARGE CONTINUOUSLY FOR A MINIMUM OF 168 HOURS BEFORE INITIAL TESTING.
 - AFTER EMERGENCY LIGHT HAS BEEN POWERED DO NOT TURN OFF FOR EXTENDED PERIODS OF TIME.
 - EXIT SIGNS, EMERGENCY LIGHTS AND NIGHT LIGHTS SHALL NOT BE SWITCHED.
 - IN AREAS OF OPEN STRUCTURE, MOUNT FLUORESCENT STRIP FIXTURE TO BOTTOM CHORD OF BAR JOIST, UNLESS NOTED OTHERWISE.
 - PROVIDE SEPARATE BOXES FOR GANGED SWITCHES ON SEPARATE BRANCH CIRCUITS.
 - FIXTURES DENOTED WITH "ABJ" ARE TO BE FASTENED ON UNISTRUT CHANNELS MOUNTED TO THE BOTTOM SIDE OF THE TOP CHORD OF BAR JOISTS. LOCATE THE FIXTURES RUNNING PERPENDICULAR TO BAR JOISTS WITHIN BAR JOISTS WEBBING SPACES. DO NOT FASTEN FIXTURE OR UNISTRUT CHANNELS TO ROOF DECK.
 - INSTALL PROTECT-A-LAMP COVERS ON FIXTURES LABELED WITH THE LETTER "P". ANY FIXTURE WITH EXPOSED FLUORESCENT TUBES THAT ARE MOUNTED BELOW 10'-0" AFF OR WHERE EXISTING PROTECT-A-LAMP COVERS ARE DAMAGED ANYWHERE INSIDE THE BUILDING.
 - VERIFY THAT THE OPERATING MECHANISM OF LIGHT SWITCHES IN THE BUILDING ARE MOUNTED AT A HEIGHT THAT IS IN ACCORDANCE WITH ADA AND LOCAL ACCESSIBILITY REQUIREMENTS. ANY SWITCH NOT IN ACCORDANCE WITH ADA AND LOCAL ACCESSIBILITY REQUIREMENTS IS TO BE LOWERED TO THE APPROPRIATE HEIGHT. GENERAL CONTRACTOR SHALL REPAIR WALL AND FINISHES AS REQUIRED. EXISTING CONTROLS AND LIGHTING PATTERNS ARE TO BE MAINTAINED. EXTEND/REROUTE EXISTING BRANCH CIRCUITRY AS REQUIRED.

- ELECTRICAL KEYNOTES**
- 16.125 EXISTING LIGHT FIXTURES TO REMAIN UNLESS NOTED OTHERWISE.
 - 16.126 EXISTING LIGHT FIXTURE TO BE DEMOLISHED.
 - 16.129 CONNECT TO EXISTING CIRCUIT PREVIOUSLY SERVING AREA LIGHTING THAT WAS REMOVED. MAINTAIN EXISTING CIRCUIT CONTROL UNLESS NOTED OTHERWISE. PROVIDE CONSTANT HOT FOR EMERGENCY, EXIT, AND LOCALLY CONTROLLED LIGHT FIXTURES.
 - 16.218 PROVIDE AIRCRAFT CABLE TO SUSPEND FIXTURE(S) TO HEIGHT INDICATED UTILIZING HANGERS FURNISHED WITH FIXTURE. INSTALL FIRST CABLE WITHIN 18" OF END OF EACH ROW. PROVIDE POWER TO EACH FIXTURE ROW VIA 1/2" FLEXIBLE METAL CONDUIT. FIXTURES ARE SHIPPED WITH INTERNAL WIRING HARNESS AND MECHANICAL CONNECTORS FOR CONTINUOUS ROW MOUNTING. REFERENCE MANUFACTURER'S INSTALLATION INSTRUCTIONS FOR DETAIL ON MOUNTING AND CONNECTING, TYP.
 - 16.303 REPLACE ALL LIGHT LENSES WITH NEW PRISMATIC ACRYLIC LENS FOR ALL LAY-IN LIGHT FIXTURES IN THIS AREA.

EXISTING CONDITIONS WERE TAKEN FROM ORIGINAL DRAWINGS AND MAY NOT REFLECT EXACT "AS-BUILT" CONDITIONS. CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO SUBMITTING FINAL BIDS. CONTRACTOR SHALL CAREFULLY COORDINATE NEW WORK AND DEMOLITION WITH ALL OTHER DISCIPLINES AND EXISTING CONDITIONS.

EACH SUBCONTRACTOR IS RESPONSIBLE FOR HAVING A THOROUGH KNOWLEDGE OF ALL DRAWINGS AND SPECIFICATIONS IN THEIR RELATED FIELD. THE FAILURE TO ACQUAINT THEMSELVES WITH THIS KNOWLEDGE DOES NOT RELIEVE THE RESPONSIBILITY OF PERFORMING THE WORK PROPERLY. NO ADDITIONAL COMPENSATION SHALL BE ALLOWED BECAUSE OF CONDITIONS THAT OCCUR DUE TO FAILURE TO FAMILIARIZE WORKERS WITH THIS KNOWLEDGE.

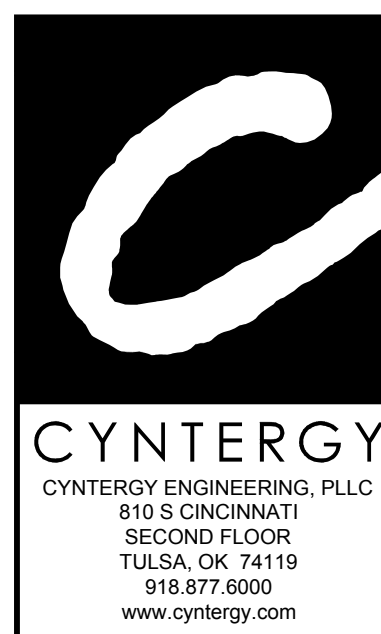

STIPULATION FOR REUSE

THIS DRAWING WAS PREPARED FOR USE ON A SPECIFIC SITE AT FORT WORTH, TX. CONTINGENTLY, WITH ITS ISSUE DATE ON 02/12/18, AND IT IS NOT SUITABLE FOR USE ON A DIFFERENT PROJECT SITE OR AT A LATER TIME. THE USE OF THIS DRAWING FOR REFERENCE OR EXAMPLE ON ANOTHER PROJECT REQUIRES THE SERVICES OF PROPERLY LICENSED ARCHITECTS AND ENGINEERS. THE REPRODUCTION OF THIS DRAWING FOR USE ON ANOTHER PROJECT WITHOUT THE AUTHORIZATION AND MAY BE CONTRARY TO THE LAW.

Walmart
Neighborhood Market
FORT WORTH, TX
STORE NO. 2979-211
JOB NUMBER: USRP-000304 | GENERAL REMODEL

ISSUE BLOCK

DATE	DESCRIPTION
02/12/18	PERMIT/ BID

30 X 42 SHEET SET

CHECKED BY: BLW
DRAWN BY: NSW
PROTO: 52
PROTO CYCLE: 12/29/17
DOCUMENT DATE: 02/12/18

DOCUMENTS WITHOUT SIGNATURE AND REQUIRED SEAL OF AOR/EOR ARE NOT FOR CONSTRUCTION

ERIC KESTERSON, P.E.
ENGINEER OF RECORD
CA # F-2220

LIGHTING PLAN

SHEET: E1